

# Certificate

The **graphite spiral wound gasket type LG - 13 - IR** with external and internal ring

of **Leader Gasket of Slovakia s.r.o.**

**ul.1.mája 71/36, 01483Bytča, Slovak Republic**

was tested according to VDI Guide Line 2440 (Edition November 2000).

After 48 hours of ageing at 300°C in air the leakage rate

**$3.0 \cdot 10^{-6}$  mbar l / (s·m)**

meets the requirement

**$10^{-4}$  mbar l / (s·m)** (leakage rate criterion in VDI 2440).

The gasket can be considered to be of high performance according to TA Luft.

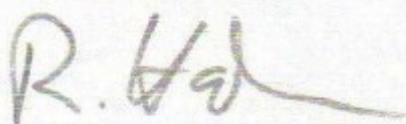
This Certificate is valid only in connection with our

**Test Report 950 748 001 Dr.Koc/Hh/Gue dated April 04, 2003**

and the testing and boundary conditions given in this report.



Stuttgart, April 04, 2003

  
Dipl.-Ing. R. Hahn  
Head of Department Sealing Technology